

WEBASTO UNITE x MONTA


1

Vorbereiten.

Sie benötigen

- Zugriff auf die Web-Oberfläche der UNITE (entweder auf den Hotspot oder im lokalen Netz)
- Zugriff auf das Monta Charging Portal oder den neuen Charging Hub (<https://portal2.monta.app>)
- Die ChargePoint ID Ihrer Wallbox (z.B. 7000335522000003).
Diese ist u.a. auf dem Gehäuse zu finden.

WEBASTO UNITE x MONTA

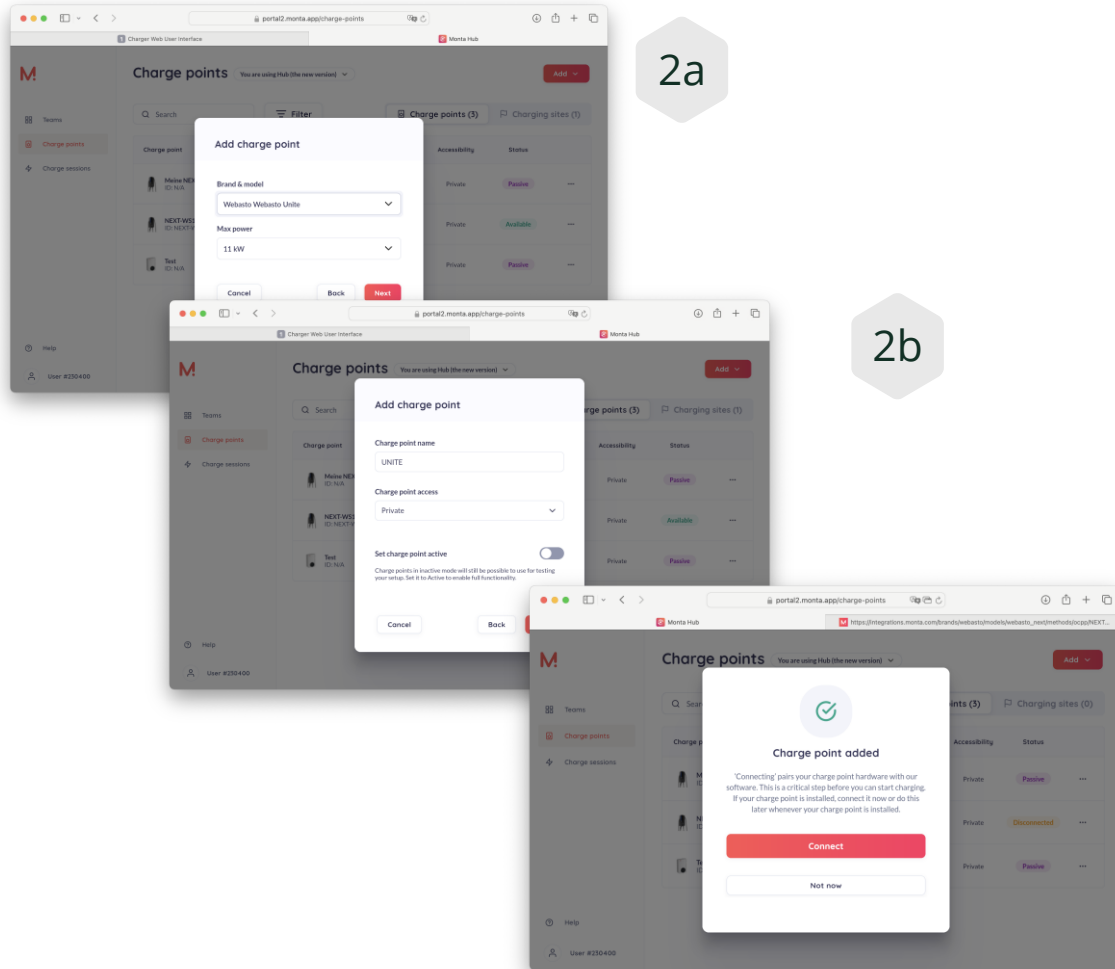

2

Anlegen in Monta

Sie benötigen

- Fügen Sie einen neuen ChargePoint hinzu und wählen Sie „Webasto Unite 11kW“
- Wählen Sie den Standort aus
- Geben Sie die Details an (Privat oder Öffentlich und ein beliebiger Name)
- Klicken Sie auf „CONNECT“ um in den Integrations Manager zu gelangen

WEBASTO UNITE x MONTA


3

Anlegen in Monta


- Im Integrations Manager wählen Sie OCPP aus
- Geben Sie anschließend die ChargePoint ID ein, Groß/Kleinschreibung ist wichtig.
- Klicken Sie auf „Continue“. Sie erhalten den Backend-Endpunkt der in der Wallbox einzutragen ist, meistens:

<wss://ocpp.monta.app>

3a

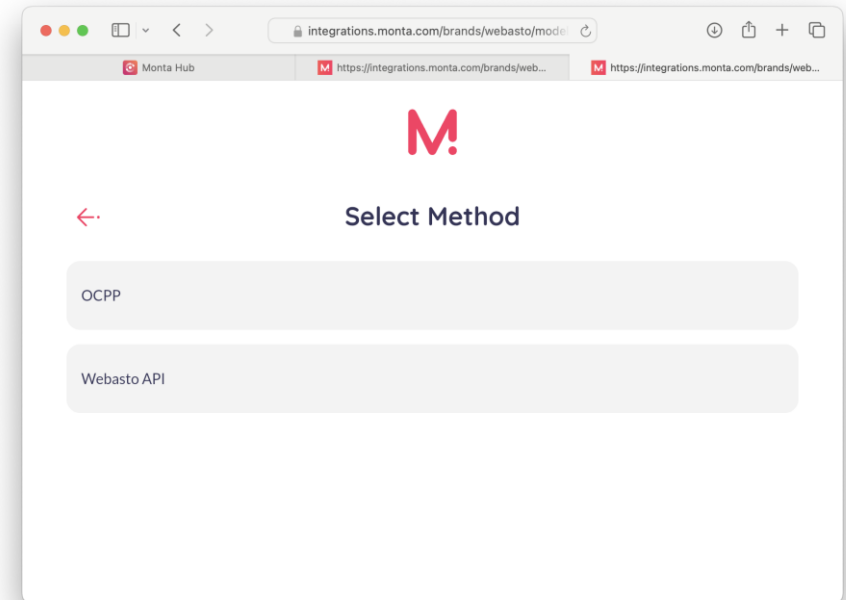

3b

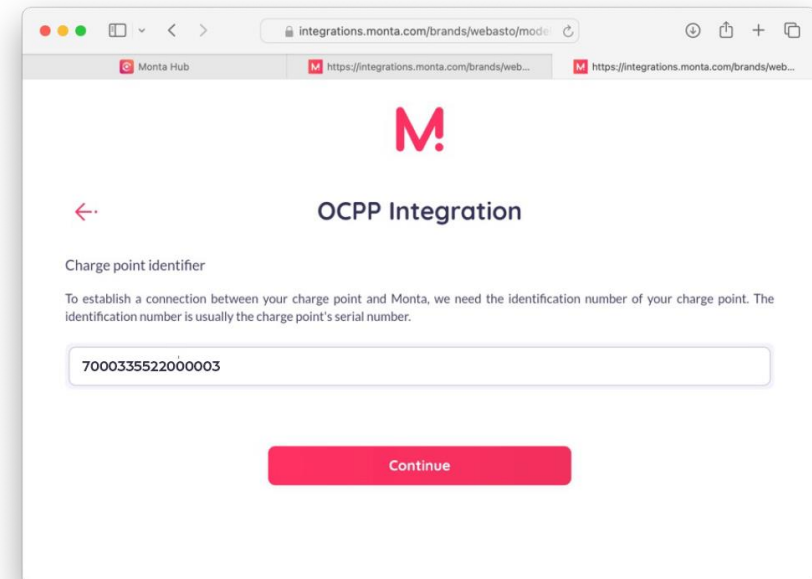

WEBASTO UNITE x MONTA

4



Konfiguration der UNITE

Wichtig ist, dass die UNITE entweder mit 4G, WLAN oder LAN mit dem Internet verbunden ist. Dies kann kontrolliert werden wenn im Hauptmenü mindestens eine IP-Nummer zu sehen ist.

- Unter „Backend“ ist der Backend-Endpoint von Monta einzutragen: `wss://ocpp.monta.app`

Klicken Sie anschließend auf „Speichern“ oder „Save“.

Die Konfiguration der Unite ist damit bereits abgeschlossen.

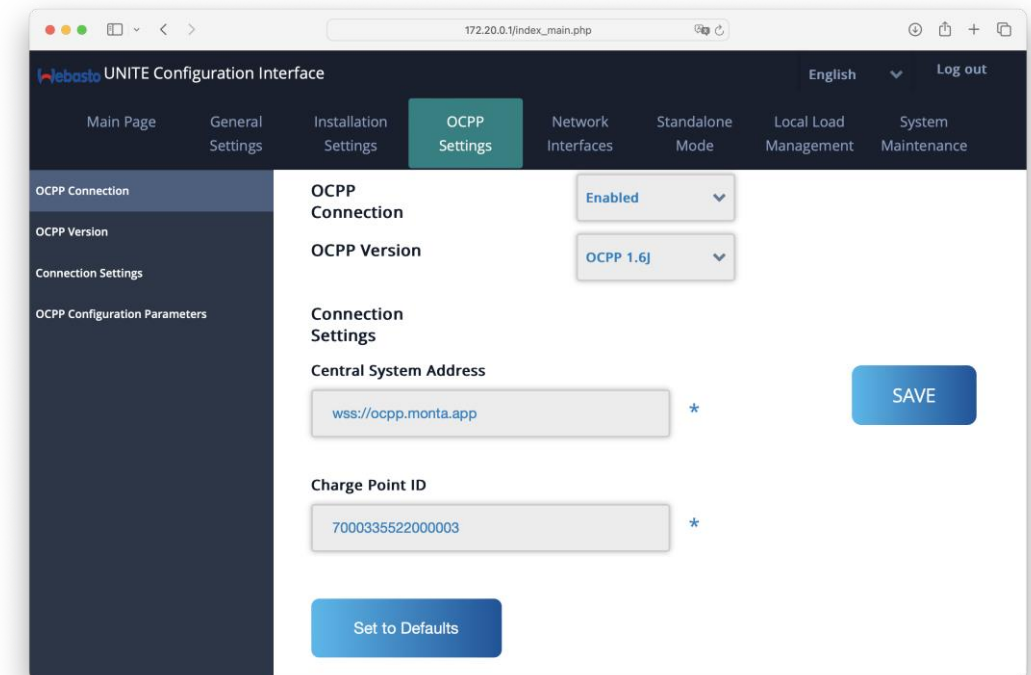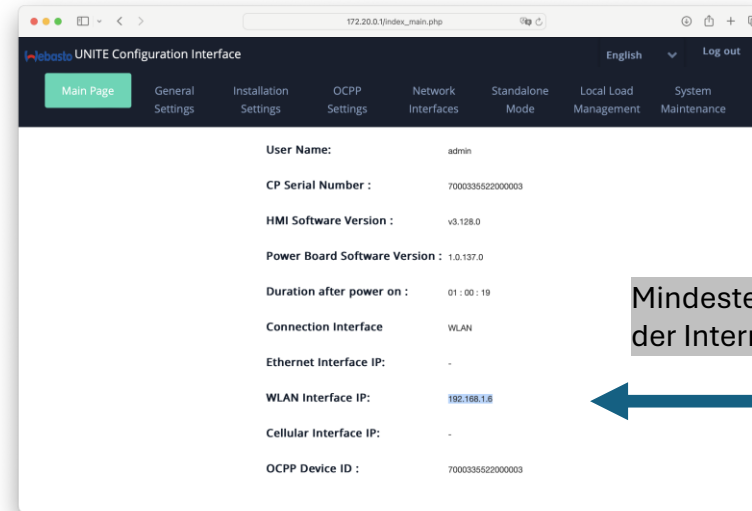



WEBASTO UNITE x MONTA

5

Abschluss

Klicken Sie nun auf „Yes, pair charge Point“ im Monta Portal. Das Portal akzeptiert nun die Verbindung und koppelt sich mit der Box.

Yes, pair charge point

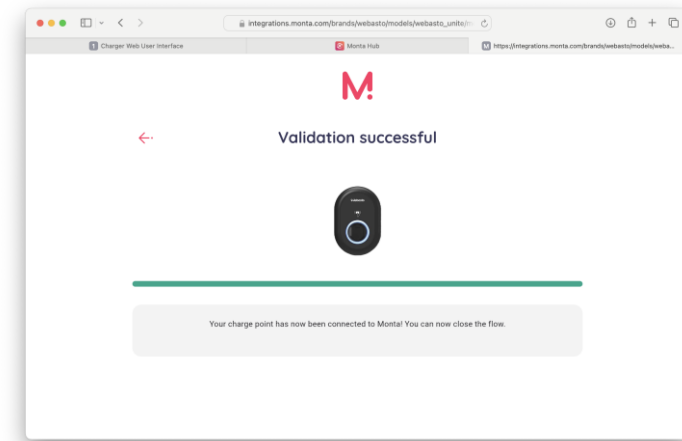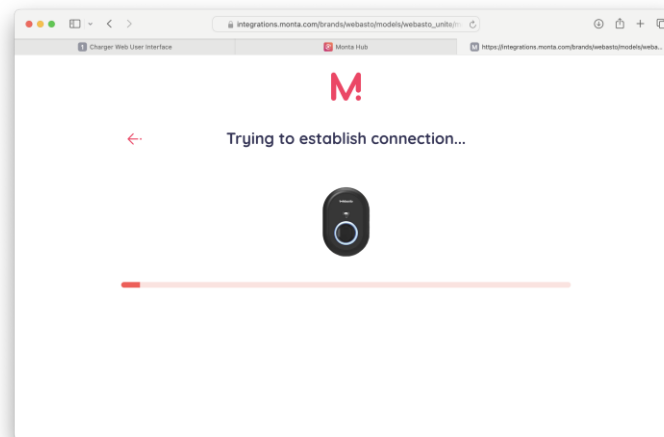


WEBASTO UNITE x MONTA


6

Kontrolle

In Monta wird eine korrekte Backend-Verbindung angezeigt. In der UNITE ist die ChargePoint ID sichtbar, diese sollte identisch sein.

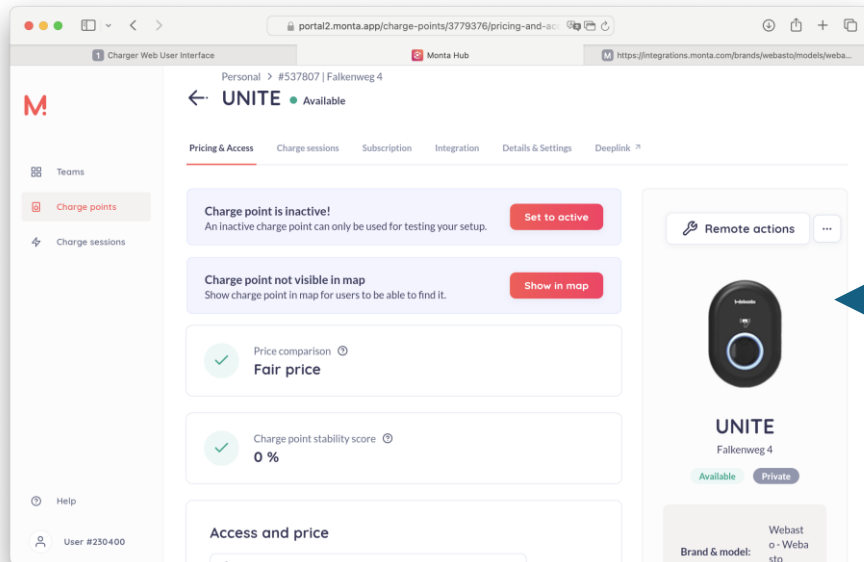

The screenshot shows the Monta web interface for a charge point configuration. The URL is `portal2.monta.app/charge-points/3779376/pricing-and-ac...`. The page title is "UNITE" and it is marked as "Available". The interface includes a sidebar with "Teams", "Charge points", and "Charge sessions". The main content area has tabs for "Pricing & Access", "Charge sessions", "Subscription", "Integration", "Details & Settings", and "DeepLink". There are several status messages: "Charge point is inactive!" with a "Set to active" button, "Charge point not visible in map" with a "Show in map" button, "Price comparison" showing "Fair price", and "Charge point stability score" showing "0%". A "Remote actions" button is visible. The charge point is identified as "UNITE Falkenweg 4" and is currently "Available". The brand and model are listed as "Webasto" and "Webasto".

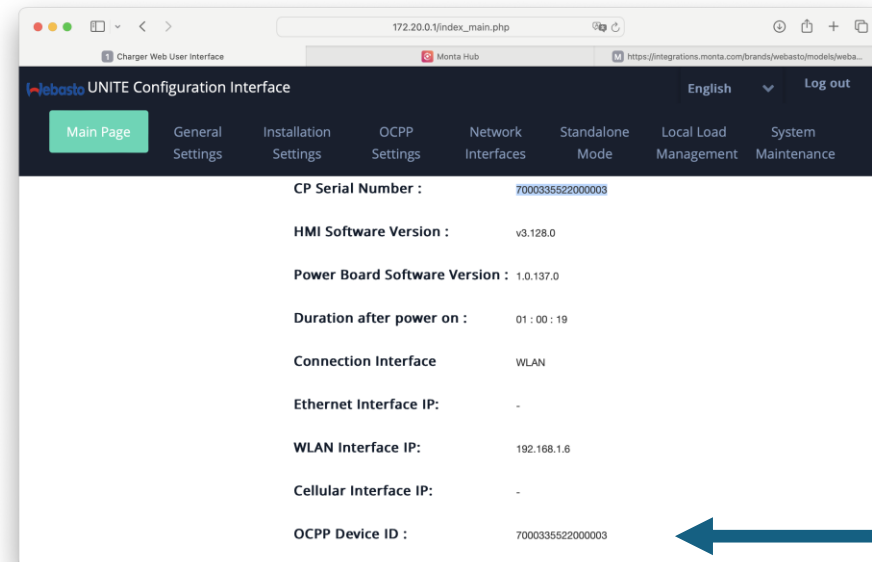

The screenshot shows the Webasto UNITE Configuration Interface. The URL is `172.20.0.1/index_main.php`. The interface has a dark header with "Webasto UNITE Configuration Interface" and "English" language selection. The main content area has a navigation menu with "Main Page", "General Settings", "Installation Settings", "OCPP Settings", "Network Interfaces", "Standalone Mode", "Local Load Management", and "System Maintenance". The configuration details are as follows:

CP Serial Number :	7000335522000003
HMI Software Version :	v3.128.0
Power Board Software Version :	1.0.137.0
Duration after power on :	01 : 00 : 19
Connection Interface	WLAN
Ethernet Interface IP:	-
WLAN Interface IP:	192.168.1.6
Cellular Interface IP:	-
OCPP Device ID :	7000335522000003