


TurboConnect Software Update Instructions


Verifying TurboConnect software version is up to date

1. Power on the device and wait until the device is fully booted (**This will take a few minutes**)
 - a. The device is fully booted when the LED indicator switches from trailing white (booting) to solid blue (idle)
2. Once fully booted, the charger's Wi-Fi access point will be visible and be **displayed as the serial number**. Using a laptop/desktop, connect to this access point using the Wi-Fi password found in the manual as shown below.
 - a. Wi-Fi password found in manual


Note: This password is unique for each charger

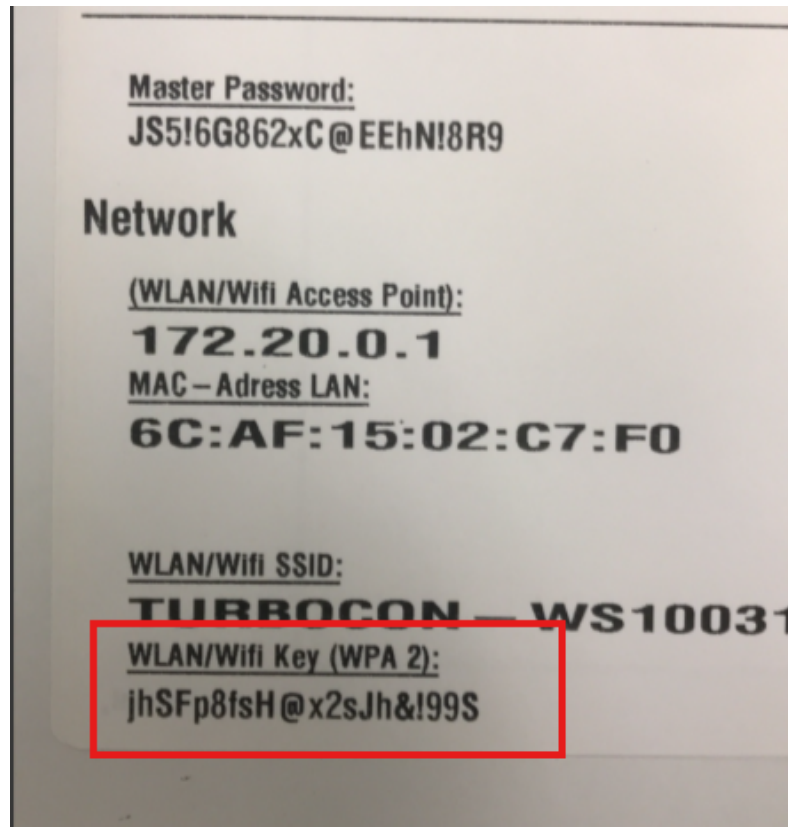


- b. Connecting to the access point

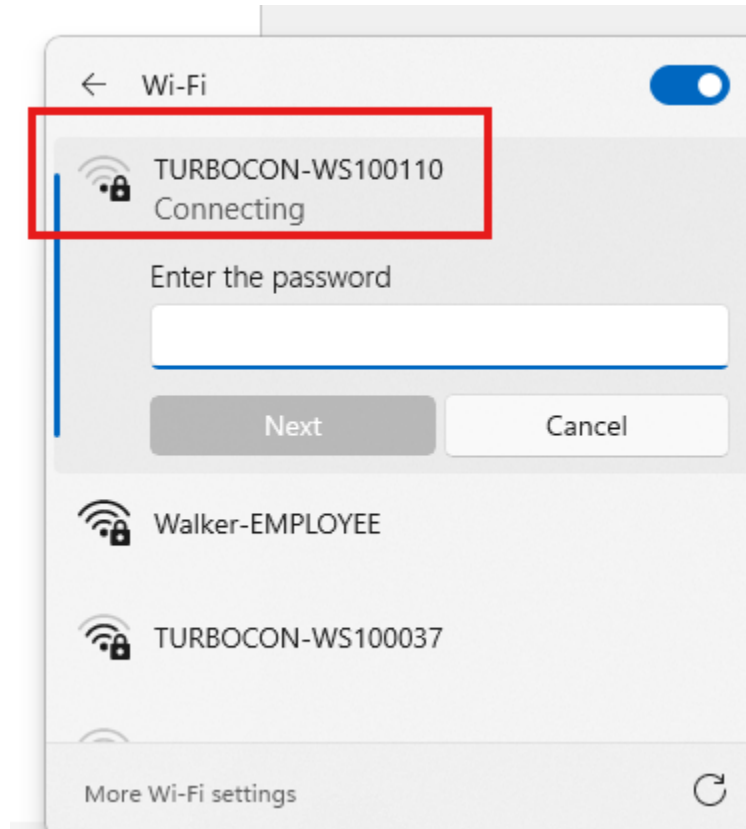


3. Once connected, open a web browser (such as Google Chrome, Microsoft Edge, etc) and go to <https://172.20.0.1> to access the device's web UI

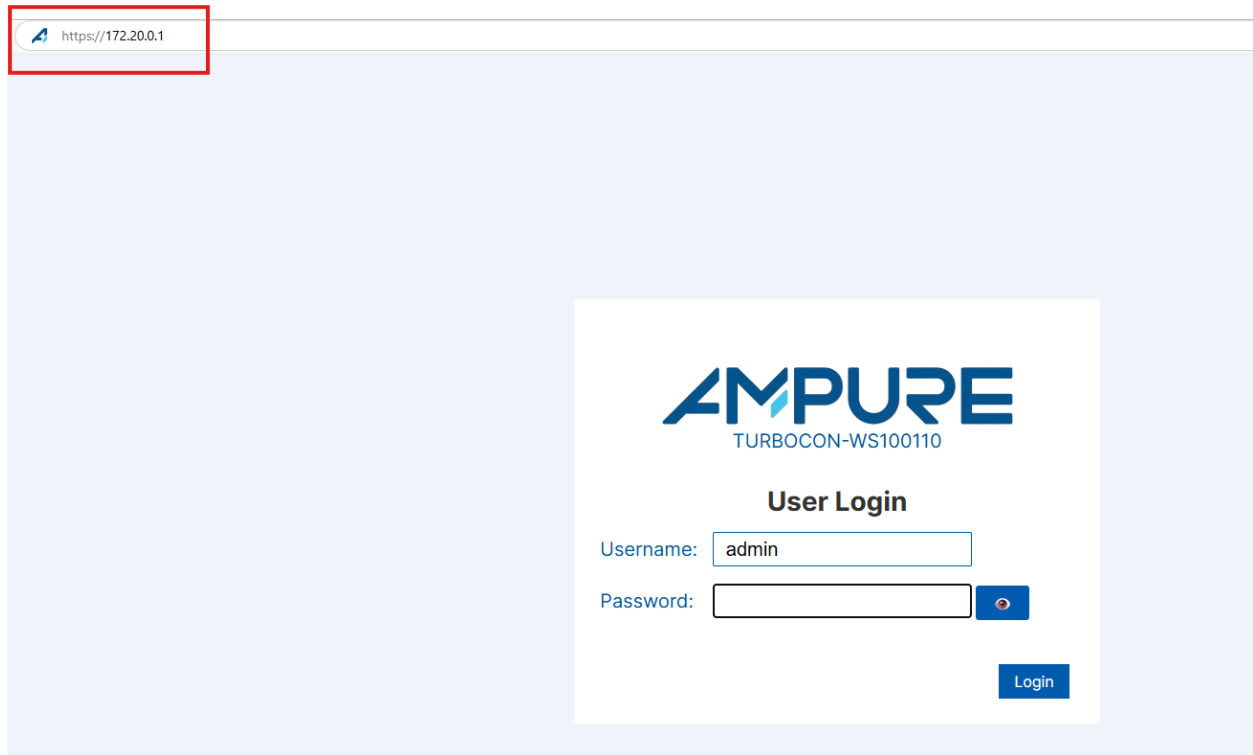

4. Login to the Web UI using the following credentials:
 - a. Username: admin
 - b. Password: Found in the manual as Master Password (Unique per device)

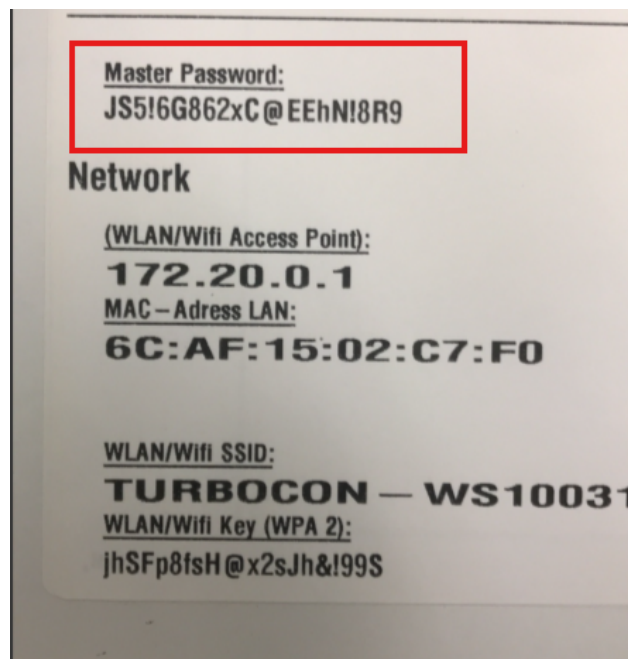

5. Once successfully authenticated, you will land on the home page of the Web UI. Navigate to the “**System**” tab, then scroll down to the **Software Information** section

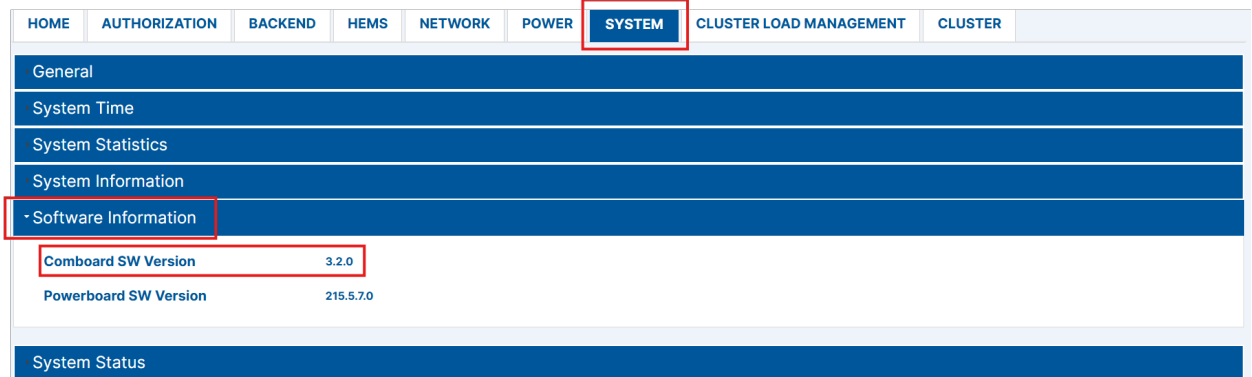


If the **Comboard SW Version** is under 3.2.2, please visit this link to download the updated software version:

- Link here

Then continue with the following steps to update the TurboConnect

6. In the same page, navigate to **Firmware Update** and select the file downloaded from the above link

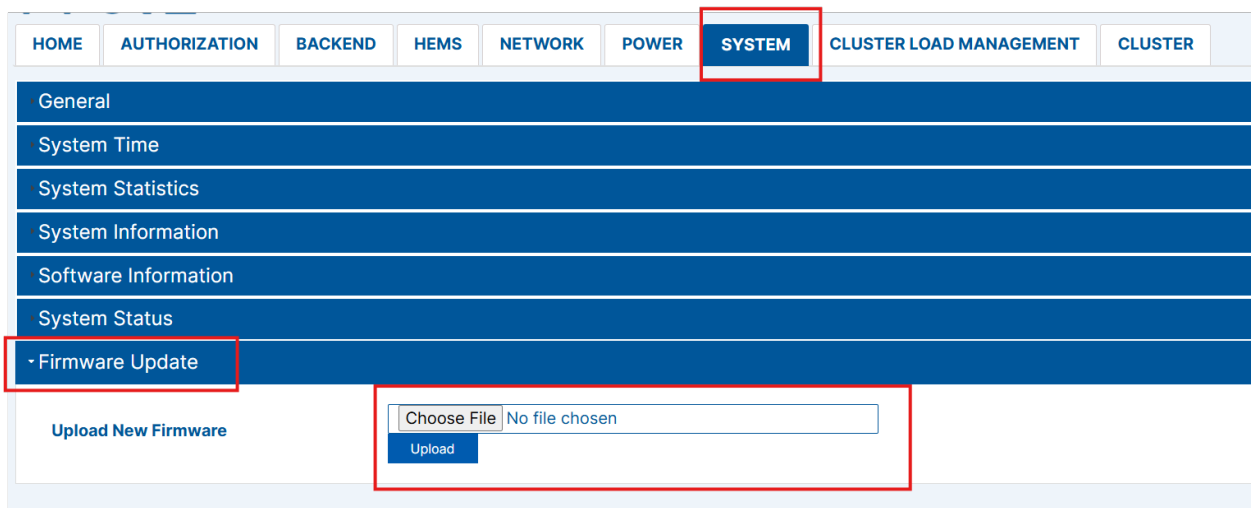

7. Once the file has been selected, the update will begin. When the update is complete, the system will reboot. **(The update will take a few minutes)**
8. Wait until the update is complete, the system has reboot, and until the Wi-Fi access point is visible again

9. Log back into the Web UI and verify the software version has been updated

Not secure | <https://172.20.0.1>

MPURE

HOME AUTHORIZATION BACKEND HEMS NETWORK POWER **SYSTEM** CLUSTER LOAD MANAGEMENT CLUSTER

General

System Time

System Statistics

System Information

Software Information

Comboard SW Version	3.2.2
Powerboard SW Version	215.5.7.0

System Status

10. Done